

# RADAR WIND PROFILERS

Scintec is ISO 9001 quality certified



LAP®3000 Standard



LAP®3000 Large



LAP®8000

## LAP Series

### Features

- Vertical profiles of wind speed and direction in the lower troposphere
- Efficient radar antennas using phased-array technology
- 5 beams, 4 horizontally tilted and 1 vertical
- Integrated clutter screen
- SIRP digital IF processor for unmatched performance
- Powerful software for Windows
- Extensive self-test and real-time monitoring
- Modular, robust design
- Long service life

### Applications

- Weather analysis
- Forecasting
- Severe weather
- Spaceports
- Defense
- Atmospheric research
- Aerostat operation
- Unmanned aerial vehicles operation
- Climate research
- Air quality
- Emergency response
- Airport wind shear and turbulence

# LAP Series

## RADAR WIND PROFILERS

The Scintec **LAP® Series** Radar Wind Profilers provide continuous and real-time tropospheric profiles of horizontal wind speed, wind direction, vertical wind speed and turbulence with high resolution in time and height.

The operating principle is based on the scattering of electromagnetic pulses at inhomogeneities in the air with subsequent Doppler analysis of the backscattered signal. The wind vector is derived using the Doppler Beam-Swinging method.


The LAP® Series Radar Wind Profilers support a wide range of applications in aviation, science, air quality, and weather forecasting. They work automatically and virtually maintenance free.

LAP® Series Radar Wind Profilers are economic to operate and suited for use in a variety of environments including meteorological networks, airports, spaceports, industrial plants, and even unmanned remote sites.


### Rack with LAP®3000 Indoor Units



### Rack with LAP®8000 Indoor Units

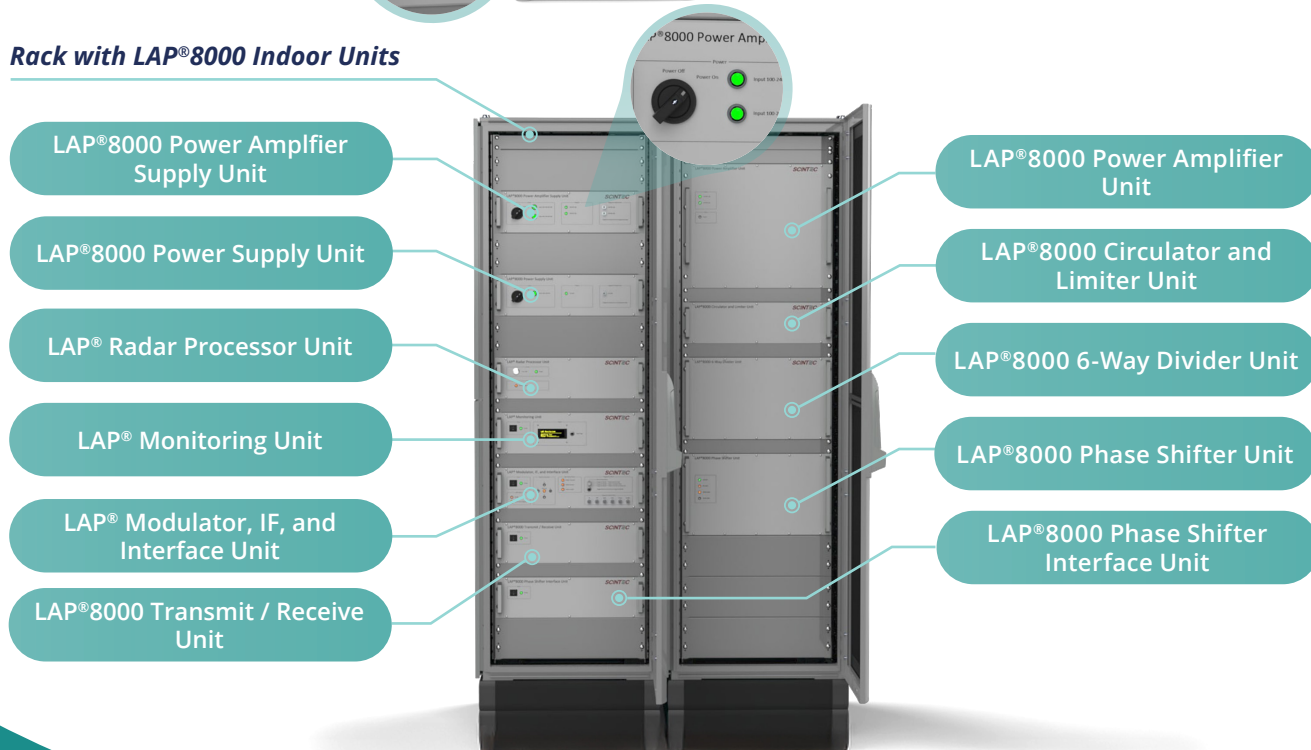


## MODELS

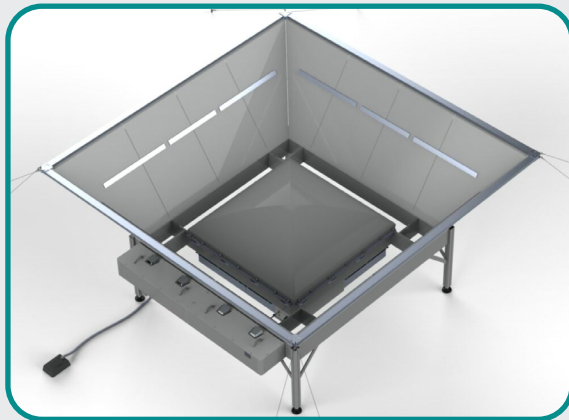


### ***Radar Wind Profiler LAP®3000 - Standard Antenna***

The Scintec LAP®3000 is the standard model of the LAP®3000 Radar Wind Profilers for reliable and continuous wind measurements up to a height of ~4 km above the ground with proven performance. The integrated clutter screen yields good ground-clutter suppression.

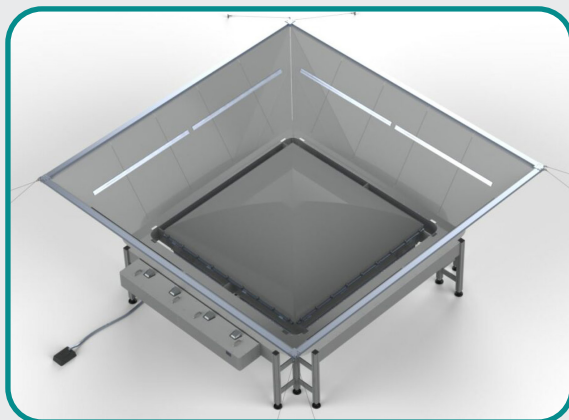

### ***Radar Wind Profiler LAP®3000 - Large Antenna***

The larger antenna aperture of this LAP®3000 Radar Wind Profiler model provides the highest performance and clutter resilience. It is used for the most critical applications. It allows reliable and continuous wind measurements up to a height of ~5 km above the ground.

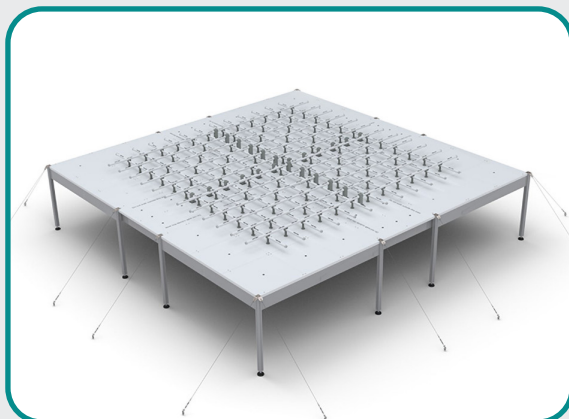


### ***Radar Wind Profiler LAP®8000***

The Scintec LAP®8000 Radar Wind Profiler operates on a lower radio frequency and achieves the highest vertical measurement range. With its large antenna area, it provides wind measurements up to a height of ~8 km above the ground.


For all wind profiler models, a variety of radio-frequency variants are available for use in different regions worldwide. Consult Scintec for support.

# COMPETITIVE ADVANTAGES

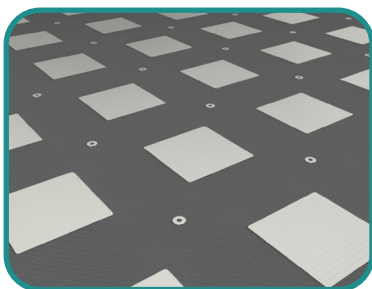


## ***Phased Array Antennas***

All LAP® Series Radar Wind Profilers use phased-array antennas. This means that the antennas consist of a large number of individual elements which are emitting and receiving with varying phase relations. The same antennas can point into and receive from different directions without movement and the whole antenna areas are used at any pointing direction, resulting in maximum efficiency (power-aperture product). Since only one static antenna area is used for any pointing direction, installation does not require much space and with the LAP®3000, the clutter screen is even effectively integrated to provide optimum ground clutter suppression.

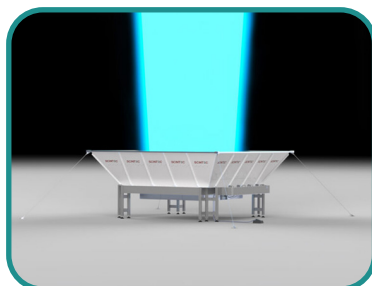

## ***True Vertical Beams***

Fluctuations of the vertical wind are fundamentally related to turbulence and convection. The measurement of vertical wind variance is a key to quantify the strength of atmospheric turbulence, often expressed in terms of the kinetic energy dissipation rate (EDR). In order to measure the vertical wind variance with a wind profiler, it is essential to use an antenna with true (and not calculated) vertical pointing direction. Unlike a rotating dish or most reflector antennas, the phased-array antennas of the LAP® Series Radar Wind Profilers provide true vertical beams for a precise measurement of atmospheric turbulence.

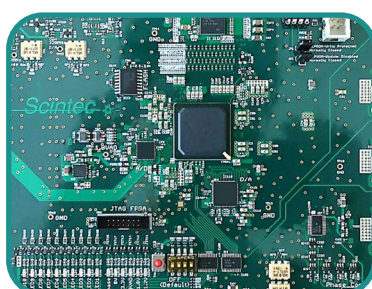

## ***All New Digital Signal Processor SIRP***

The new SIRP Digital IF Processor was specifically designed for radar wind profilers and offers characteristics never found in wind profiler signal processing before. It combines vertical signal oversampling, 16 bit binary pulse coding, true Gaussian matched filters, and freely programmable height gates. The revolutionary ACNS (Advanced Coherent-Noise Suppression) technique cancels distinct radio frequency interferences and improves data quality at sites prone to radio pollution. All these features result in higher data quality, better height coverage, and a perfect match to the user's specific needs.



## ***Groundbreaking Operation Software***


The SRun Operation Software for Windows brings an entirely new level of performance, comfort, and flexibility to the world of wind profilers. A variety of graphical data representations, data output formats and data transfer options matches all needs and data environments. SRun provides real-time data output during the measurements and also permits the user to reprocess previously recorded data using different system settings. All software-control is menu-driven and an auto-configuration option even optimizes the system without the need of user interaction.



## ***Fully Modular Design***

In addition to its performance characteristics, system uptime is a key factor in determining the quality of a radar wind profiler. With many profilers being operated within critical application environments such as at airports, the LAP® Series Radar Wind Profilers have been expertly manufactured for years in large quantities by the global market leader, which results in an unparalleled reliability. Moreover, a fully modular design allows most repairs to be done within minutes. Scintec keeps a large number of modules in stock for worldwide distribution if ever needed.

# COMPETITIVE ADVANTAGES

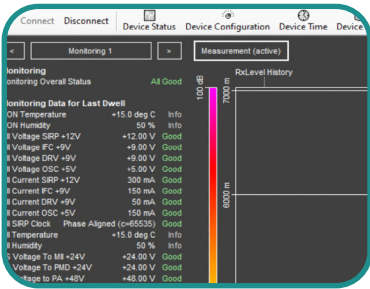

## Extensive Self-Test

The critical modules of the LAP® Series Radar Wind Profilers are equipped with built-in diagnostic tools which digitally communicate with a dedicated Monitoring Unit. This Monitoring Unit continuously verifies the proper function of all components and creates and logs an extensive functionality report in user-defined intervals. The system status is stored together with the output data and optionally reported to the user's data environment over protocols such as SNMP. A summary of the system status is displayed on a toggling monitoring screen.



## RASS Extension for Precise Temperature Measurements

For all LAP® Series Radar Wind Profilers, a Radio Acoustic Sounding System (RASS) is available for remote temperature measurements. Compared to other methods of remote temperature sensing, the RASS technique is unsurpassed when it comes to accuracy and vertical resolution. RASS works with all kinds of clouds and precipitation and is longterm calibration-free.

# SERVICES OFFERED


Factory acceptance test, site acceptance test, installation, factory training, and on-site training.

# ACCESSORIES




## Uninterruptible Power Supply (UPS)

The UPS provides backup power to a LAP®3000 or a LAP®8000 Radar Wind Profiler for at least 20 minutes of full system operation. The UPS is connected to the LAP® Monitoring Unit, which monitors the status of the UPS: mains operation, battery operation, or low-battery alert. When the UPS battery charge level becomes too low, the measurement is automatically stopped and the computer system shuts down in a controlled manner. Once power is restored, the system restarts and resumes measurement automatically without manual intervention.

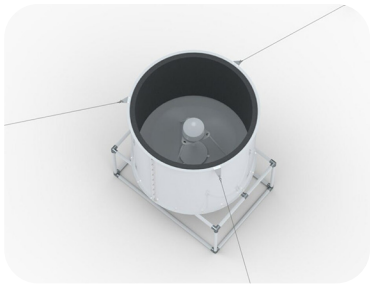

## RASS Extension

The RASS Extension adds the capability for measuring temperature profiles to a LAP®3000 or a LAP®8000 Radar Wind Profiler.



# SPECIFICATIONS

| Description                    | LAP®3000 Standard Antenna                                                                                             | LAP®3000 Large Antenna                                                                                                | LAP®8000                                                                                                               | Remarks                                                                                  |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Operating frequency            | 915 MHz, 1280 MHz, 1290 MHz, 1299.21 MHz, or 1357.5 MHz                                                               | 915 MHz, 1280 MHz, 1290 MHz, 1299.21 MHz, or 1357.5 MHz                                                               | 437.5 MHz or 449 MHz                                                                                                   | other operating frequencies available on request                                         |
| Antenna type                   | flat antenna with micro-patch phased array. Electronically steered.                                                   |                                                                                                                       | flat antenna with coaxial-collinear phased array. Grid of 2 x 12 antennas stacked in 2 layers. Electronically steered. |                                                                                          |
| Antenna aperture               | 3 m²                                                                                                                  | 6.7 m²                                                                                                                | 28 m²                                                                                                                  |                                                                                          |
| Antenna radiating elements     | 64 elements for 915 MHz, 144 elements for 1280 MHz, 1290 MHz, 1299.21 MHz, 1357.5 MHz                                 | 144 elements for 915 MHz, 324 elements for 1280 MHz, 1290 MHz, 1299.21 MHz, 1357.5 MHz                                | 216 elements                                                                                                           | number of simultaneously radiating phased-array elements                                 |
| Antenna directivity gain       | 24.9 dBi for 915 MHz, 28.1 dBi for 1280 MHz, 28.2 dBi for 1290 MHz, 28.2 dBi for 1299.21 MHz, 28.6 dBi for 1357.5 MHz | 28.7 dBi for 915 MHz, 31.6 dBi for 1280 MHz, 31.7 dBi for 1290 MHz, 31.8 dBi for 1299.21 MHz, 32.1 dBi for 1357.5 MHz | 29.2 dBi for 437.5 MHz, 29.3 dBi for 449 MHz                                                                           |                                                                                          |
| Number of beams                | 5 beams: 4 oblique beams and 1 vertical beam                                                                          |                                                                                                                       |                                                                                                                        |                                                                                          |
| Beam tilt angle                | 22.4° for 915 MHz, 15.8° for 1280 MHz, 15.7° for 1290 MHz, 15.6° for 1299.21 MHz, 14.9° for 1357.5 MHz                | 14.7° for 915 MHz, 15.8° for 1280 MHz, 15.7° for 1290 MHz, 15.6° for 1299.21 MHz, 14.9° for 1357.5 MHz                | 15.0°                                                                                                                  | tilt angle from zenith for the oblique beams.                                            |
| Beam width                     | 10.4° for 915 MHz, 7.2° for 1280 MHz, 7.1° for 1290 MHz, 7.1° for 1299.21 MHz, 6.8° for 1357.5 MHz                    | 6.7° for 915 MHz, 4.8° for 1280 MHz, 4.8° for 1290 MHz, 4.7° for 1299.21 MHz, 4.5° for 1357.5 MHz                     | 7.0° for 437.5 MHz, 6.8° for 449 MHz                                                                                   | full width between -3 dB points in one-way transmission pattern.                         |
| Transmitter output power       | 800 W for 915 MHz, 1000 W for 1280 MHz, 1290 MHz, 1299.21 MHz, 700 W for 1357.5 MHz                                   | 800 W for 915 MHz, 1000 W for 1280 MHz, 1290 MHz, 1299.21 MHz, 700 W for 1357.5 MHz                                   | 2000 W                                                                                                                 | peak envelope power, nominal                                                             |
| Pulse width                    | 265 to 3340 ns                                                                                                        | 265 to 3340 ns                                                                                                        | 400 to 3340 ns                                                                                                         | configurable via software                                                                |
| Minimum measurable wind height | 100 m                                                                                                                 | 100 m                                                                                                                 | 200 m                                                                                                                  | dependent on pulse width, meteorological conditions, and surrounding clutter environment |
| Maximum measurable wind height | up to 4 km in clear air and beyond in precipitation                                                                   | up to 5 km in clear air and beyond in precipitation                                                                   | up to 8 km in clear air and beyond in precipitation                                                                    | dependent on configuration, meteorological conditions, and environment                   |
| Height resolution              | 40 to 500 m                                                                                                           | 40 to 500 m                                                                                                           | 60 to 500 m                                                                                                            | configurable via software. Defined by pulse width                                        |
| Wind speed accuracy            | < 1 m/s                                                                                                               |                                                                                                                       |                                                                                                                        |                                                                                          |
| Wind direction accuracy        | < 10°                                                                                                                 |                                                                                                                       |                                                                                                                        |                                                                                          |

# SPECIFICATIONS

| Description                                     | LAP®3000 Standard Antenna                                                                                                                                                                                                                 | LAP®3000 Large Antenna                                                                                                       | LAP®8000                                                                                                                     | Remarks                                                                                                           |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Measurement range of horizontal wind components | -100 to 100 m/s                                                                                                                                                                                                                           |                                                                                                                              |                                                                                                                              | larger measurement ranges configurable via software                                                               |
| Measurement range of vertical wind components   | -20 to 20 m/s                                                                                                                                                                                                                             |                                                                                                                              |                                                                                                                              | larger measurement ranges configurable via software                                                               |
| Averaging time                                  | 3 to 60 min                                                                                                                                                                                                                               |                                                                                                                              |                                                                                                                              | configurable via software. Typically 10 to 60 min. Running averages supported with update intervals down to 1 min |
| Output data                                     | Horizontal wind speed and direction, wind components U/V/W, standard deviations of wind, wind shear, eddy dissipation rate, $C_n^2$ , backscatter, precipitation fall speed, moments, spectra, time series of I/Q samples, quality flags. |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Data displays                                   | wind barbs, vector plots, time vs. height color plots, profile plots, time series plots, spectra plots, tabular displays                                                                                                                  |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Data reprocess                                  | output data can be recalculated by reprocessing time series, spectra, moments, or main data                                                                                                                                               |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Configuration                                   | configuration with graphical user interface. No manual editing of configuration files required                                                                                                                                            |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Real-time monitoring                            | real-time monitoring during measurement includes monitoring of internal voltages, currents, temperature, RF power                                                                                                                         |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Self-test                                       | fully automatic self-test includes testing of internal voltages, currents, RF power, system noise, dynamic range, external RF interferences                                                                                               |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| File formats                                    | supported output file formats include standard ASCII formats, NetCDF, WMO BUFR, NOAA Winds, CMA (China), MRI (Japan), KWPB (Korea), LAP-XM compatible, Avimet XML, user-defined formats                                                   |                                                                                                                              |                                                                                                                              | other and customized output file formats available on request                                                     |
| Network data output                             | automatic data transfer to external servers via FTPS, FTP, TCP, UDP, shared network folders                                                                                                                                               |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Network plot output                             | automatic creation of plot image files and transfer to external servers via FTPS, FTP, shared network folders. Live plots via web browser, customizable                                                                                   |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Network time synchronization                    | automatic time synchronization with an external network time server via NTP                                                                                                                                                               |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Network supervision                             | system status can be retrieved via SNMP or status files                                                                                                                                                                                   |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Operating system compatibility                  | Windows 11, Windows 10, Windows Server 2025, Windows Server 2022, Windows Server 2019                                                                                                                                                     |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Dimensions of antenna structure                 | 4.2 x 4.2 x 2.3 m                                                                                                                                                                                                                         | 5.1 x 5.1 x 2.3 m                                                                                                            | 7.4 x 7.4 x 1.8 m                                                                                                            | LAP®3000: including integrated clutter fence                                                                      |
| Installation area for antenna structure         | 7.4 x 7.4 m                                                                                                                                                                                                                               | 8.2 x 8.2 m                                                                                                                  | 11 x 11 m                                                                                                                    | including guy wires and ground-mounting, without RASS extension                                                   |
| Operating conditions for outdoor components     | temperature: -40°C to +50°C;<br>relative humidity: 0% to 100%                                                                                                                                                                             |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Operating conditions for indoor components      | temperature: +10°C to +35°C;<br>relative humidity: 0% to 80%, non-condensing                                                                                                                                                              |                                                                                                                              |                                                                                                                              |                                                                                                                   |
| Power requirements                              | AC power input:<br>100 to 240 V, 50 to 60 Hz, single-phase, 2300 W.<br><br>Average power consumption: typically 100 to 350 W                                                                                                              | AC power input:<br>100 to 240 V, 50 to 60 Hz, single-phase, 2300 W.<br><br>Average power consumption: typically 100 to 350 W | AC power input:<br>100 to 240 V, 50 to 60 Hz, single-phase, 3600 W.<br><br>Average power consumption: typically 200 to 750 W |                                                                                                                   |

Installations worldwide



**SCINTEC**

**Scintec AG**

+49 7472-986430  
+49 7472-9808714

info@scintec.com

Wilhelm-Maybach-Str. 14  
72108 Rottenburg, Germany

**Scintec Corporation**

+1 (303) 666-7000  
+1 (303) 666-8803

info@scintec.com

1730, 38th Street  
Boulder, Colorado 80301, USA

**Scintec Solutions Ltda.**

+55 (21) 96903-7506

info@scintec.com

Praia de Botafogo, 501, Torre Pão  
de Açúcar, 1st floor, Rio de Janeiro  
22250-040, Brazil

**Scintec Asia Pacific Limited**

+852 3127-5633  
+852 3127-5656

info@scintec.com

6/F Luk Kwok Centre  
72 Gloucester Road  
Wan Chai, Hong Kong



www.scintec.com